

DS-2AE4123T/4223T-A/A3 HD720P/1080P Turbo PTZ Dome Camera



Hikvision DS-2AE4123T/4223T-A/A3 PTZ Dome Cameras are able to capture high quality images in low light environment with its black anti-reflective glass. Embedded with HD progressive scan CMOS chip makes WDR and 1MP/2MP real-time resolution possible. With the 23X optical zoom Day/Night lens, the camera offers more details over expansive areas.

Key Features

- 1/3", 1/2.8" HD Progressive Scan CMOS
- 1280x720/1920x1080
- 23X Optical Zoom
- DWDR
- 3D intelligent positioning function
- Support Turbo HD and CVBS output



DS-2AE4123T/4223T-A/A3 HD720P/1080P Turbo PTZ Dome Camera



Function Description

System function:

- 1/3", 1/2.8" high performance CMOS, up to 1280x720/ 1920x1080 resolution
- $\pm 0.1^\circ$ Preset Accuracy
- Self-adaptive to HIKVISION, Pelco-P/D protocol
- 3D intelligent positioning function
- Power-off memory function: restore PTZ & Lens status after reboot
- Built-in temperature sensor, with display of internal temperature
- Lightning protection, surge protection and voltage transient protection
- IP66 standard (outdoor dome)
- RS-485 communication diagnosis
- Scheduled PTZ movement
- UTC(Up the Coax) function

Camera function:

- Auto focus, auto white balance, backlight compensation and auto/manual day & night switch
- Privacy masks programmable
- 3D DNR, digital **zoom(digital zoom only 1080P support)**
- DWDR, **EIS(EIS only 1080P support)**

PTZ function:

- 360° endless pan range and $0^\circ -90^\circ$ tilt range
- 160° /s Pan Preset Speed and 120° /s Tilt Preset Speed
- $0.1^\circ -160^\circ$ /s Manual Pan Speed and $0.1^\circ -$

120° /s Manual Tilt Speed

- 256 presets programmable; preset image freezing capability
- 8 patrols, up to 32 presets per patrol
- 4 patterns, with the total recording time not less than 10 minutes
- Proportional zoom function
- Park action: auto call up of PTZ movement, after a defined time of inactivity

DS-2AE4123T/4223T-A/A3 HD720P/1080P Turbo PTZ Dome Camera




Model	DS-2AE4123T-A/A3	DS-2AE4223T-A/A3
Camera Module		
Image Sensor	1/3" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.05Lux@(F1.4,AGC ON); B/W: 0.005Lux@(F1.4,AGC ON)	
Max. Image Resolution	1280 × 720	1920 × 1080
Focal Length	4-92.0mm, 23x	
Digital Zoom	Not support	16X
Zoom Speed	Approx.3s(Optical Wide~Tele)	
Angle of View	49-2.2 degree(Wide~Tele)	
Min. Working Distance	10~1,000mm(Wide~Tele)	
Aperture Range	F1.4-F3.5	
Focus Mode	Auto / Semiautomatic / Manual	
DWDR	Support	
S / N Ratio	≥ 50dB	
Shutter Time	1-1/10,000s	
AGC	Auto / Manual	
White Balance	Auto / Manual / ATW / Indoor / Outdoor	
Day & Night	IR Cut Filter	
Privacy Mask	8 privacy masks programmable; a maximum of 4 zones can be masked simultaneously on the same video screen	8 privacy masks programmable; a maximum of 8 zones can be masked simultaneously on the same video screen
Enhancement	3D DNR, BLC	3D DNR, BLC, EIS
Pan and Tilt		
Range	Pan:360° endless; Tilt: 0°~90°(Auto Flip)	
Speed	Pan Manual Speed: 0.1°~160°/s, Pan Preset Speed: 160°/s Tilt Manual Speed: 0.1°~120°/s, Tilt Preset Speed: 120°/s	
Number of Preset	256	
Patrol	8 patrols, up to 32 presets per patrol	
Pattern	4 patterns, with the total recording time not less than 10 minutes	
Park Action	Preset / Patrol / Pattern / Pan scan / Tilt scan / Panorama scan	
Scheduled Task	Preset / Patrol / Pattern / Pan scan / Tilt scan / Panorama scan	
RS-485 communication diagnosis	Support	
Input/ Output		
Turbo HD Output	1 turbo HD720P/1080P output, 1.0V[p-p] / 75Ω, NTSC (or PAL) composite, BNC	
CVBS Output	1.0V[p-p] / 75Ω, NTSC (or PAL) composite, BNC	
Alarm Input	2	
Alarm Output	1	
RS-485 Interface	Half-duplex mode Self-adaptive HIKVISION, Pelco-P, Pelco-D protocol	
UTC function	HIKVISION_C	

DS-2AE4123T/4223T-A/A3 HD720P/1080P Turbo PTZ Dome Camera



General	
Menu Language	English
Power	24VAC Outdoor dome: Max. 18W (Heater On), Max. 12W(Heater Off) Indoor dome: Max.12W
Working Temperature / Humidity	-30 °C-65°C(-22°F-149°F) 90% or less
Protection Level	IP66 standard TVS 4,000V lightning protection, surge protection and voltage transient protection
Mounting	Various mounting modes optional
Dimensions	Φ185×330mm (Φ7.28"×12.99")
Weight (approx.)	4Kg (8.81lbs)
Mount Option (only suitable for outdoor dome)	Long-arm wall mount: DS-1602ZJ; Corner mount: DS-1602ZJ-corner; Pole Mount: DS-1602ZJ-pole; Power box mount:DS-1602ZJ-box; Swan-neck mount: DS-1619ZJ

Dimensions

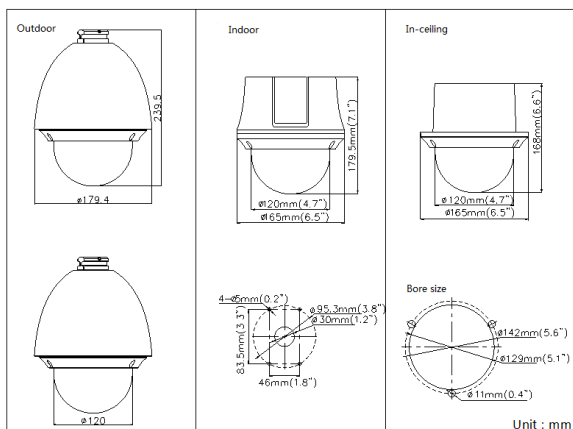

Accessories



DS-1602ZJ
Wall Mount

DS-1602ZJ-Conner
Conner Mount

DS-1602ZJ-Pole
Pole Mount

DS-1602ZJ-Box
Box Mount



DS-1663ZJ
Ceiling mount



DS-1661ZJ
Pendant mount



DS-1662ZJ
Pendant mount



DS-1619ZJ
Swan-neck Mount



DS-1005KI
USB Joy-stick